



Bs-Temperature

H=1194A/m

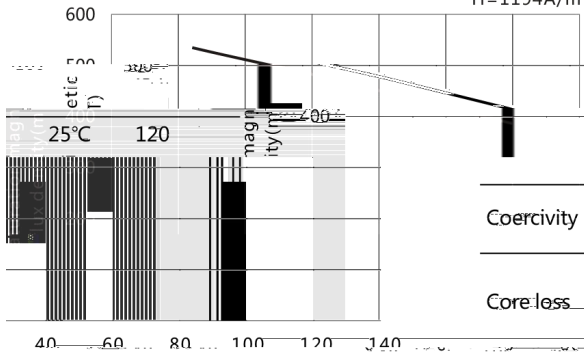

Initial permeability	μ_i	25°C	2500±25%
Remanence	B_r (mT)	25°C	120
Coercivity	H_c (A/m)	25°C	12
Core loss	P_{cv} (kW/m ³)	25°C	570
		100°C	460
		75°C	250
		100°C	460
Curie temperature	T_c (°C)		
Electrical resistivity	ρ (Ω·m)		
Density	d (kg/m ³)		

μ_i -Temperature

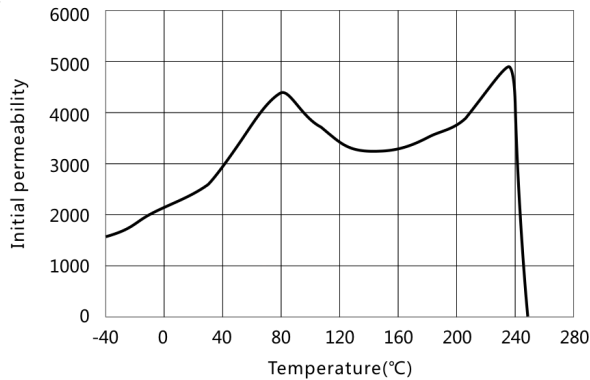

Test core : Toroid(mm)
 OD : 25
 ID : 15
 H : 7.5

-H

μ_i -Frequency

B

