


Bs-Temperature

H=1194A/m

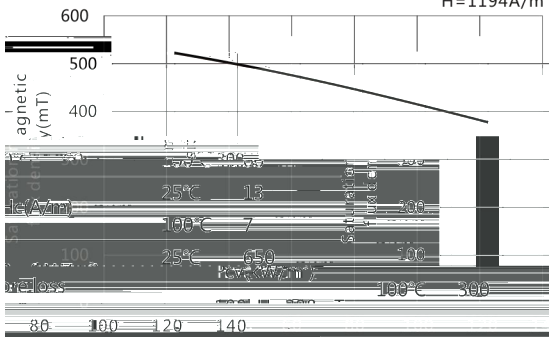

| | | | |
|----------------------------------|------------|-------|----------|
| Initial permeability | μ_i | 25°C | 2000±25% |
| Saturation magnetic flux density | Bs(mT) | 25°C | 520 |
| | | 100°C | 410 |
| Coercivity | Hc(A/m) | 25°C | 13 |
| | | 100°C | 7 |
| Core loss | Pcv(kW/m³) | 25°C | 650 |
| | | 100°C | 300 |

| | | |
|------------------------|----------------------------|------|
| Curie temperature | Tc(°C) | 200 |
| Electrical resistivity | ρ ($\Omega\cdot m$) | 6.5 |
| Density | ρ (kg/m³) | 7400 |

